


PRODUCT PROFILE

TUFF-CLAD

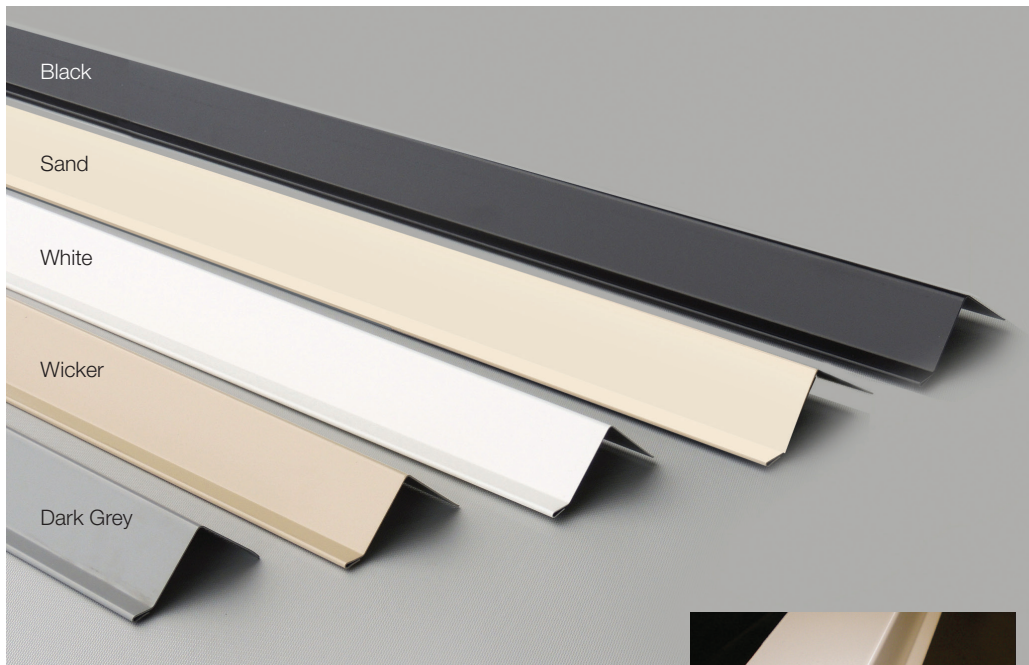

TUFF SYSTEM ADVANTAGE

Termination details have been difficult in the Deck & Roof waterproofing industry. Tuff-Clad now offers the most efficient and permanent solution for terminating your membrane details. Tuff-Clad is fastened to the substrate and the membrane is welded to the PVC metal to ensure a long lasting waterproof finish.

There is now no need to adhere the membrane over the edge, mechanically fastening your terminations and risking separation and water penetration.

For additional information, specifications, CAD drawings or MSDS, please contact Tuff Industries Inc.


Toll Free: 1-877-860-9333

NOTES: This document is not an installation guideline. Tuff Industries Inc. will not be responsible for the improper use or installation of its products.



Standard Drip:

Deck Surface 2 1/8"
Face Drop 2" • Kick 1/2"
Return 1/2"



Standard Wall:

Deck Surface 1 1/2"
Upturn 2" • Kick 1/2"
Return 1/2"

FEATURES

- Available in 5 standard colors
- PVC coating for water tight terminations
- Standard profiles or custom designs
- Minimal expansion and contraction
- Compatible with all Tuff membranes

PRODUCT SPECIFICATIONS

- Gauge .022 / 24 ga. standard
- PVC Film thickness - 21 mils.
- Zinc coating designation - Z275 (G90)
- Colors: Black, Sand, White, Wicker, Dark Grey

PACKAGING

- Flatstock: 4' x 8' sheets
- Individual standard profiles
- Custom profiles available

