
PRODUCT PROFILE



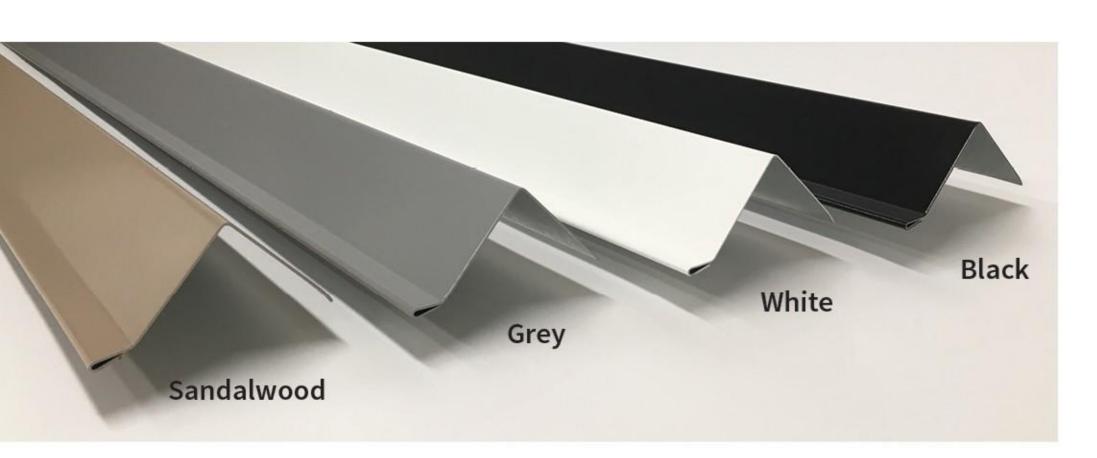

TUFF SYSTEM ADVANTAGE

Termination details can be difficult in the Deck and Roof waterproofing industry. Tuff-Clad now offers the most efficient and permanent solution for terminating your membrane details. Tuff-Clad is fastened to the substrate and the membrane is welded to the PVC metal to ensure a long lasting waterproof finish.

There is now no need to adhere the membrane over the edge, mechanically fastening your terminations and risking separation and water penetration.

For additional information, specifications, CAD drawings or MSDS, please contact Tuff Industries Inc.

Toll Free: 1-877-860-9333

NOTES: This document is not an installation guideline. Tuff Industries Inc. will not be responsible for the improper use or installation of its products.



Standard Drip



Standard Wall
In white only. Custom colour orders available.

FEATURES

- Available in 4 standard colors
- Laminated PVC for water tight terminations
- Standard profiles or custom designs
- Minimal expansion and contraction
- Compatible with all Tuff membranes

PRODUCT SPECIFICATIONS

- · Gauge .022 / 24 ga. standard
- PVC Film thickness 21 mils.
- Zinc coating designation -Z275 (G90)
- Colors: Sandalwood, Grey, White, Black

PACKAGING

- · Single units
- Tubes of 26 pieces
- Flatstock material available in 4' x 8' sheets



ECONODEK



T INDUSTRIES